




Arens Smart Switch Controller

The Smart Switch controller is ideal if you require a manual open/close option, and for integrating with other building systems to control the opening and closing of the windows.

- Low-force tactile switches
- May be configured to provide either momentary switching for partial operation or latch switching for one-touch operation
- Provides indicators that show the direction of actuator operation
- Is available in portrait or landscape
- May control up to forty Arens relay boards

The Smart Switch Controller is mounted in a Clipsal Series 2000 flush switch plate enabling easy mounting to interior walls.

Power to operate the panel is either through a 1.5 A plug pack or connection to auxiliary power output of Arens Relay Module. 



Inputs

- **Master Open** – will open windows when a switch closure is detected.
- **Master Close** – will close windows when a switch closure is detected.

Outputs

- **Open** - pull to ground when open is requested for up to 45 seconds.
- **Close** - pull to ground when close is requested for up to 45 seconds.

Technical Specifications


Operating voltage	24 VDC
Current	0.1 A
Master Open input	Voltage Free Contacts
Master Close input	Voltage Free Contacts
Open output	3.0 A
Close output	3.0 A
Operating temperature	-10°C – +50°C

Part No.

	Horizontal	Vertical
Arens Smart Switch Controller	07/47-101H	07/47-101V



Dimensions

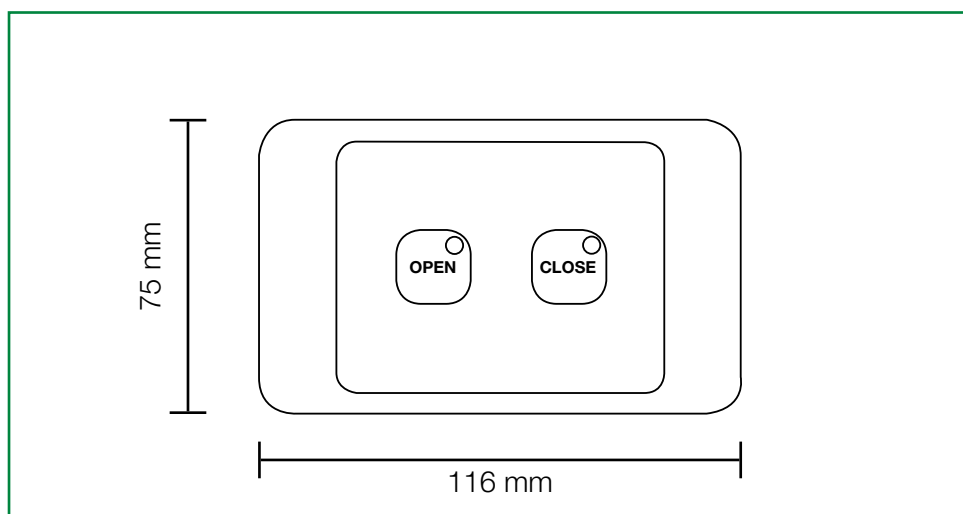

Technical Details

