




## Arens Spindle Actuator

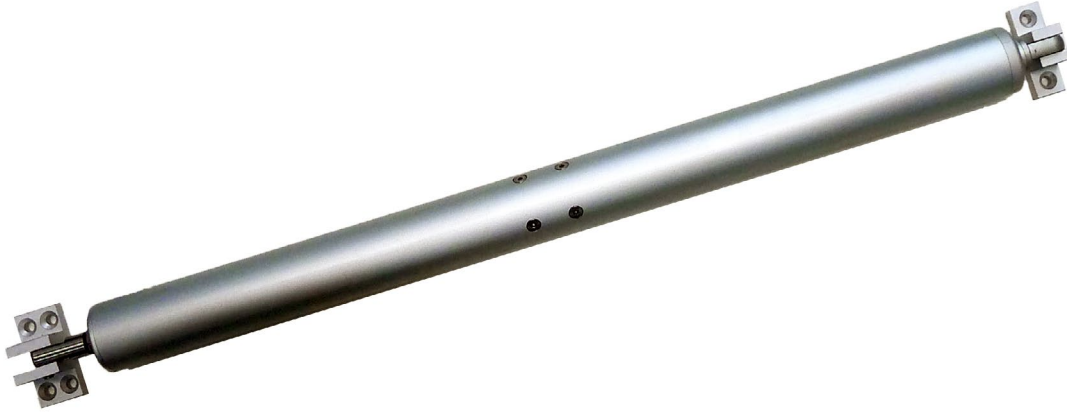

The Arens 24V Spindle Actuator is ideal for the high level commercial and residential windows. It is commonly used in the operation of louvre galleries with a standard stroke of 180mm or optionally a 300mm stroke is available.

With an IP65 rating it is ideal for internal and external use and it has a neat, slimline body with a diameter of only 34mm.

It allows for integration with the full range of Arens Ventilation Controllers, Building Management System or can be operated by the occupant using a simple wall mounted switch.

A stroke limiting collar is available if windows are required to be restricted to meet Australian safety standards or window manufacturer recommendations.

### Features


- Neat, slim body (36 mm diameter)
- Front or back fixing (back bracket to be ordered separately)
- Stroke limiting collar available
- Supplied with 1.5 m of cable
- Available ex stock in 180 mm stroke and as a special indent in 300 mm stroke <sup>(1)</sup>



## Technical Specifications

<b>Voltage</b>	24 VDC ± 10%	24 VDC ± 10%
<b>Stroke</b>	180 mm	300 mm
<b>Force</b>	650 N	800 N
<b>Speed</b>	~ 6 mm/s	~ 3 mm/s
<b>Max. current absorption</b>	~ 1 A	~ 0.8 A
<b>Operation</b>	Polarity inversion	Polarity inversion
<b>Parallel connection</b>	Yes	Yes
<b>Limit stop</b>	Electronic	Electronic
<b>Safety stop</b>	Electronic	Electronic
<b>Time rating</b>	50%	50%
<b>Protection class</b>	IP 65	IP 65

## Dimensions

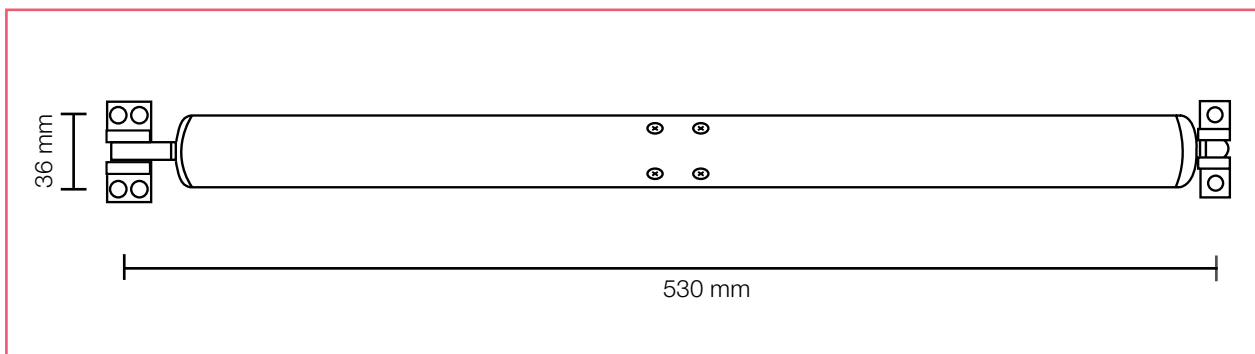

## Application

- Ideal for domestic and commercial use
- May be used on windows of any level or in banks of windows
- When required stroke may be limited to meet Australian safety standards
- Integrates with all Arens ventilation controllers
- Support for C-Bus and other Building Management Systems

## Part No.

	<b>ASG</b>
<b>Arens Spindle Actuator 180mm</b>	07/52-11918ASG
<b>Arens Spindle Actuator 300mm</b>	07/52-11930ASG