



Arens Compact Chain Winder




The Arens Compact Chain Winder is a 24V operator ideal for high level commercial and residential awning windows.

Combining quiet and smooth operation with a slimline design, it provides minimal aesthetic interruption for occupants.

The Compact Chain Winder provides a great degree of flexibility in that it can be operated by occupants using a wall mounted switch, integrated with all Arens Ventilation Controllers through Building Management System.

If your windows are over 1200mm wide, we recommend our 24 V Vega Synchro Actuator (with built-in synchronisers) to allow for two points of attachment to help prevent bending and twisting of the window frame and comply with manufacturers recommendations.

Features


- This slimline chain winder measures 382 mm in length, 34 mm high and 44 mm deep
- A double link stainless steel chain gives an opening of 250mm or 300mm as standard. On special indent 200mm or 400mm are available.
- Quiet and smooth operation
- The operator comes with 1.5 m cable and pivot brackets as standard
- Available ex stock in 24 VDC
- Standard colour are clear anotec and anotec black, with other standard powdercoat colours available at an additional cost 



Technical Specifications

Thrust/Relay	250N
Max operating current	0.6 A
Travel Distance	150-400mm
Speed	~ 10 mm/s
Operating Voltage	DC 24V ± 10%
Ambient Temperature	0-20 - +73 °C
Protection Class	IP 32

Dimensions

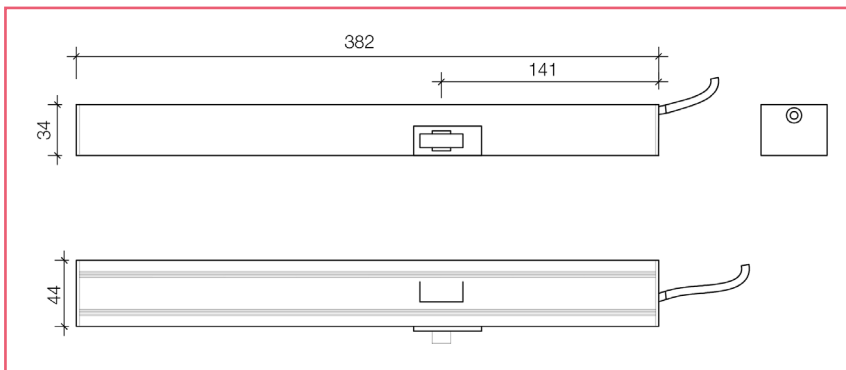

Distance L (mm)	DC 24V A (mm)
200	330
300	380
400	430

Application

- Ideal for domestic and commercial use
- May be used on windows of any level or in banks of windows
- When required chains may be shortened to meet Australian safety standards
- Integrates with all Arens Ventilation Controllers
- Support for C-Bus and other Building Management Systems

Part No.

	ASG	Black	Custom colours
Compact Winder with Standard Brackets 200mm	07/51-11120ASG	07/51-11120BLK	Upon request
Compact Winder with Standard Brackets 300mm	07/51-11130ASG	07/51-11130BLK	Upon request
Compact Winder with Standard Brackets 400mm	07/51-11140ASG	07/51-11140BLK	Upon request